Mi10 SET UP SHEET

Schumacher

Driver: Finley Whitelock | **Track:** Halifax | **Event:** Rnd 3 BRCA nationals

Date: 28/06/26 | **Qualifying:** 3 | **Final:** 2 | **Best Lap:** 16.4

TRACK TYPE

Grip Level	High ☐	Medium ☐	Low ☐
Type	Tight ☐	Open ☐	Mixed ☐
Condition	Flat ☐	Bumpy ☐	Mixed ☐
Surface	Tarmac (Asphalt) ☐	Carpet ☐	
Track Temp	°C		
Weather	Sunny		

Notes:

TYRES

Side Wall Glue Height Ø	mm		
Tyres	Contact D36		
Cleaner	Core RC brake cleaner		
Additive	MR33 v3	Wet on track ☐	
Additive Time	Front: 15 mins	Rear: 15 mins	
Heating Time	Front: 15 mins	Rear: 15 mins	
Heating Temp	Front: 100 °C	Rear: 100 °C	

Notes:
20G motor mount weight
EH front bumper

FRONT

KEY: **CF** = Carbon Fibre, **AL** = Aluminium, **P** = Plastic, **ST** = Steel
F = Front, **R** = Rear

Ride Height	5.2	mm
Camber	2	deg
Droop	23.2	mm
Castor	4	deg
Toe	-1	deg
Anti Roll Bar	1.1 ☐ 1.2 ☐ 1.3 ■ 1.4 ☐	
Upper Link Mount	0 Notch ■ 1 Notch ☐ 2 Notch ☐	
Spool Height	■ ☐ U8777 +0.5mm Alloy Eccentric ☐ U9523 Low Trans Housing ■	
Servo Horn Height	17 mm	Saver ☐
Steering Travel	25° in	out
Shock Mount Position	Inboard ■	Outboard ☐

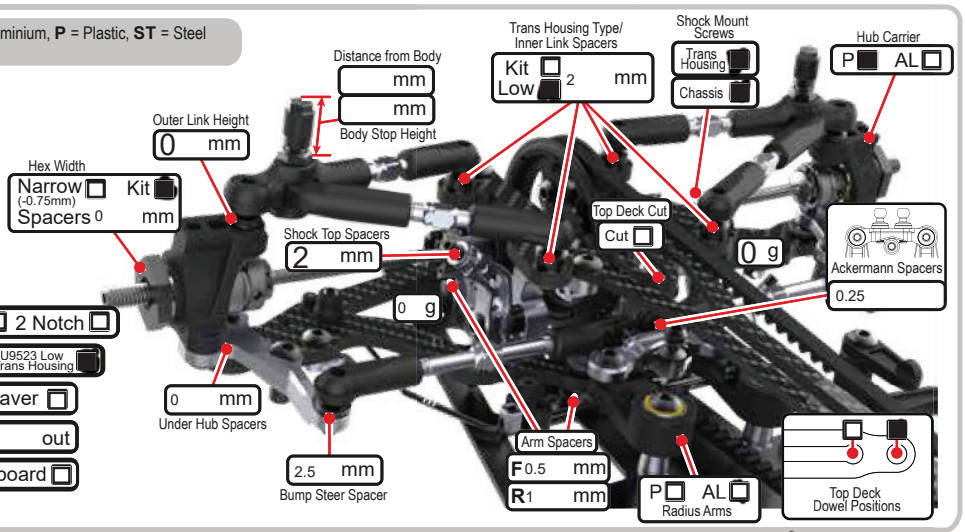

REAR

KEY: **CF** = Carbon Fibre, **AL** = Aluminium, **P** = Plastic, **ST** = Steel
F = Front, **R** = Rear

Ride Height	5.4	mm
Camber	2	deg
Droop	22	mm
Castor	2	deg
Toe	3	deg
Anti Roll Bar	1.1 ☐ 1.2 ■ 1.3 ☐ 1.4 ☐	
Upper Link Mount	0 Notch ■ 1 Notch ☐ 2 Notch ☐	
Diff Height	■ ☐ U8777 +0.5mm Alloy Eccentric ☐ U9522 Low Trans Housing ■	
Diff Setting	3000 cSt	Diff Checker # Warming ☐ Duration:
Shock Mount Position	Inboard ■	Outboard ☐

No diff warming

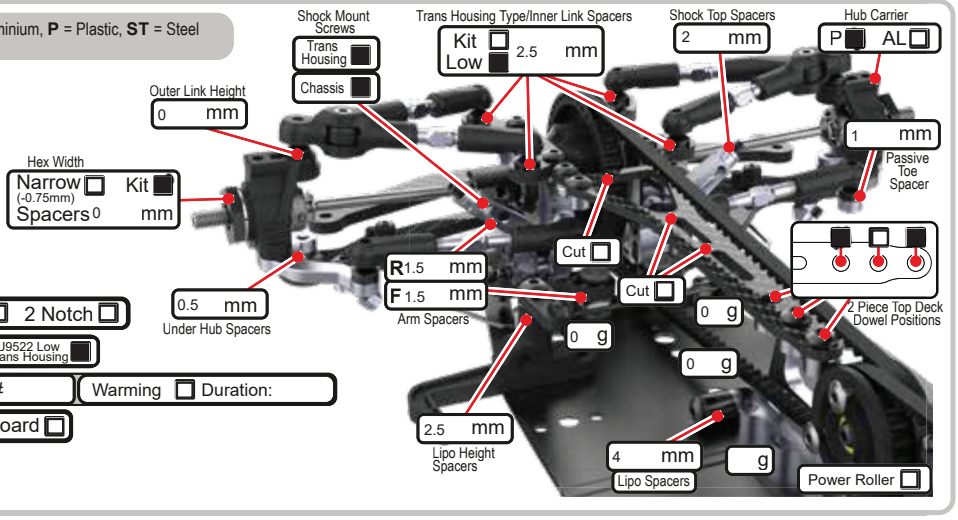

BODYSHELL

Body	Zoo-racing W		
Wing	MR33 Twister	End Plates	☐
Wing Height	mm		
Splitter Height	7.5 mm		
Body Weight	g		
Body Offset Fwrd	mm		
Front Post	1dot ☐ 2dot ☐ 3dot ☐ Pin Hole 123456 ☐		
Rear Post	1dot ☐ 2dot ☐ 3dot ☐ Pin Hole 123456 ☐		
Type:			

Notes:
Wing height 116

CHASSIS

Chassis	Carbon		
ST ☐	CF ☐	AL ☐	

Top Deck Options
1 Pc TITC U9550 ☐

Front 2 Piece	Rear 2 Piece
C/F 1.6 ☐	C/F 1.6 ☐
C/F 2.0 ■	C/F 2.0 ■

Motor Mount Screws
R ■ ■ ☐ F

PTFE Tape ☐ | Total Weight g

Weight Distribution
% g - Rear

ELECTRONICS

E.S.C.	Hobbywing G3X	+ g
Servo	Aerox	
RX	sanwa	+ g
LiPo	aerox 6000	+ g
Motor	Hobbywing G5	Spacers mm
Rotor Dia.	mm	
Timing	48 deg	
Gear Pitch	48 ☐ 64 ☐	
Pinion	45 t	
Spur	82 t	
Ratio	3.31	

SHOCKS

KEY: **x** = Stroke, **e** = external

	FRONT	REAR
Spring	Core 2.6	Core 2.8
Oil	350 cSt	350 cSt
Piston	Kit ■	Kit ■
Length (x)	7.5 mm	7.5 mm
Rebound	0 mm	0 mm
Limiters (e)	mm	mm
Body	Kit ■	K-Coat U8770 ☐

Notes: