SP2 SETUP SHEET

RCMAKER

DRIVER Brunet Antoine	**DATE** March 2026	**BEST LAP** 13.0	**LAYOUT** TECHNICAL ☐ MIXED ☑ FLOWING ☑
TRACK Thouberville	**CLASS** Modified	**BEST RUN** 23 , 5 : 06.3	**TEMP.** TRACK 20 c AIR 20 c
EVENT French nats RD1	**RESULT** QUALIFYING 2 FINALS 2	**SURFACE** Carpet	**TRACTION** LOW ☐ MEDIUM ☑ HIGH ☑

TRANSMISSION

FRONT	REAR
DRIVE SPOOL ○ DIFF ○	DIFF. OIL 7K cst
OIL ONLY IF USING DIFF	DIFF OIL WEIGHT 1.5 g
PITCH 48 ○ 64 ○	BELT LF ○ STD ○ HD ○
SPUR 110 PINION 29	FDR

SHOCKS

FRONT		REAR
4.25	SPRING	4.25
300	CST ○ OIL WT ○	350
STD ☑	PISTON	STD ☑
PROG ○ LIN ○	BODY	PROG ○ LIN ○
7	LENGTH	7

TYRES

TYRES	Rush 28 spoke wheels
ADDITIVE	MR33 V5
ADDITIVE TIME	FR 12 MIN/RR 12 MIN
WARMER TIME	FR MIN/RR MIN
WARMER TEMP.	FR Deg/RR Deg

BODY

TYPE	Ghibli 3.0
WEIGHT	Grs THICK 0.4 ○ 0.5 ○ 0.7 ○
WING	Speciale THICK 0.4 ○ 0.5 ○ 0.7 ○
POSITION	60 mm (LOWER WINDSCREEN MOLD LINE TO CENTRE FRONT BODY POST)
HEIGHT	67 mm (FROM GROUND AT RIDE HEIGHT) WING mm

ELECTRONICS

RADIO	Flysky noble STEERING EXPO -12 %
SERVO	Power Hd GTS-2
ESC	Hobbywing G3
MOTOR	Hobbywing G3 5T
BATTERY	Nosram 4200

Inov8 bumper

FRONT

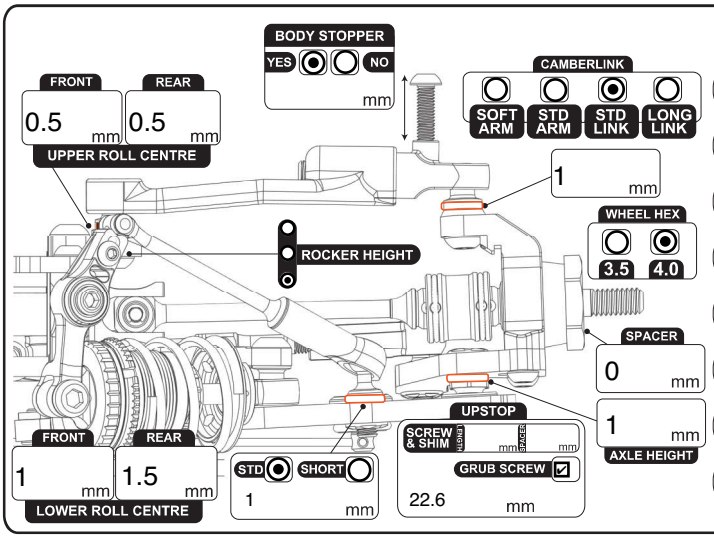

CAMBER	2	Deg
CASTER	4	Deg
TOE OUT	1	Deg
RIDE HEIGHT	5.0	mm
DROOP ARM ○ AXLE ○	23.0	mm
DIFF HEIGHT LOW ○	HIGH ○	
ANTI ROLL BAR 1.0 ○ 1.1 ○ 1.2 ○ 1.3 ○		
STEER. LOCK	25 Deg INSIDE	17 Deg OUTSIDE

REAR

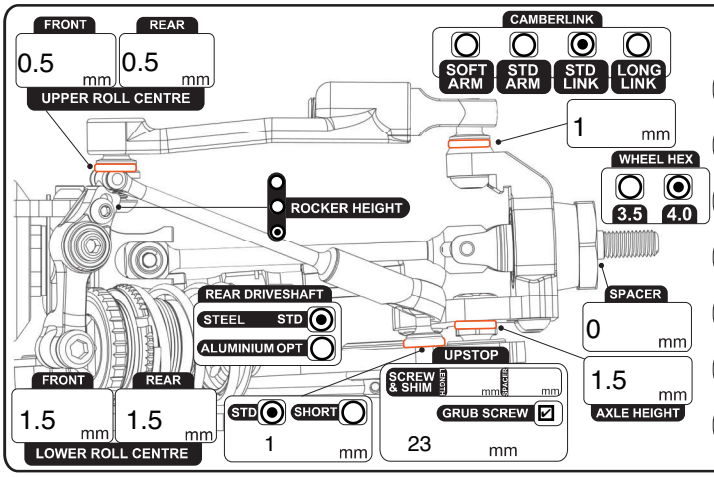

CAMBER	2	Deg
CASTER	3	Deg
TOE IN	1.5	Deg
RIDE HEIGHT	5.2	mm
DROOP ARM ○ AXLE ○	22.0	mm
DIFF HEIGHT LOW ○	HIGH ○	
ANTI ROLL BAR 1.0 ○ 1.1 ○ 1.2 ○ 1.3 ○		

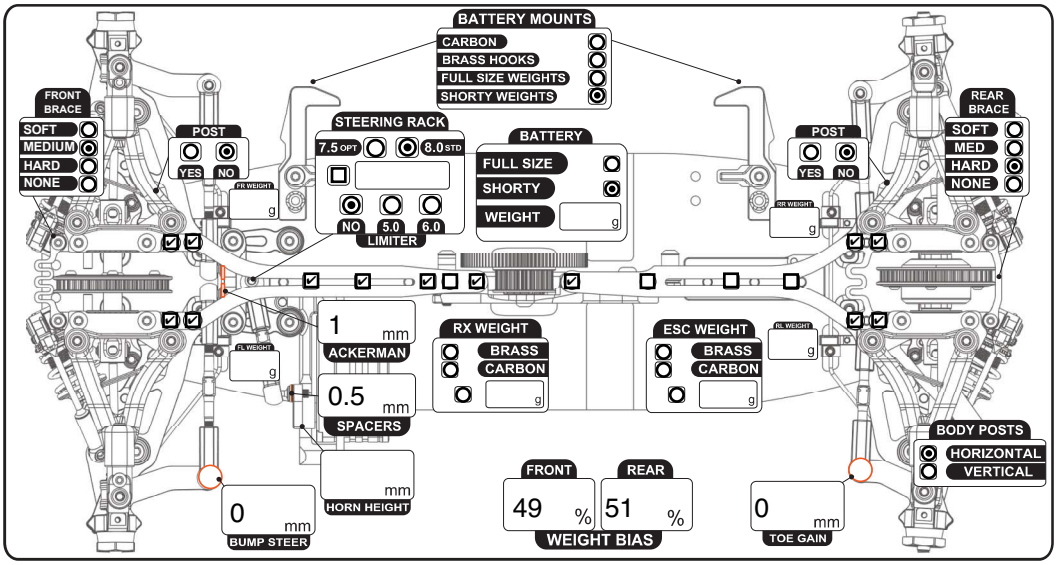

TOPDECK

FRONT	TYPE 1PC ○ 2PC ○	REAR
2 mm	THICKNESS	2 mm
C/F ○ FRP ○	MATERIAL	C/F ○ FRP ○
BRACE	CUT ○ FLEX ○ SOLID ○	

CHASSIS

FRONT	MOTORMOUNT	REAR
STIFFENER	CHASSIS TYPE	STIFFENER
BRASS ○ CARBON ○	2.2MM CARBON ○ 1.5MM ALUMINIUM ○ 1.2MM STEEL ○ OTHER ○	BRASS ○ CARBON ○ TENSIONER ☑