SET UP SHEET

Schumacher

Mi10

Driver: Matthieu Dambrine | **Track:** Hertford | **Event:** Rug Racers R2

Date: 15/11/26 | **Qualifying:** 2 | **Final:** 2 | **Best Lap:** 9.91

TRACK TYPE

Grip Level	High ☐	Medium ☒	Low ☐
Type	Tight ☐	Open ☐	Mixed ☒
Condition	Flat ☒	Bumpy ☐	Mixed ☐
Surface	Tarmac (Asphalt) ☐	Carpet ☒	
Track Temp		°C	
Weather			

Notes:

TYRES

Side Wall Glue Height Ø	58.5 mm		
Tyres	Rush 30 CPM		
Cleaner			
Additive	MR33 V5	Wet on track ☒	
Additive Time	Front: mins	Rear: mins	
Heating Time	Front: mins	Rear: mins	
Heating Temp	Front: °C	Rear: °C	


Notes:

Pro bearings
Alloy radius arms
Twister BMS
0.5mm body height adjuster

FRONT

KEY: **CF** = Carbon Fibre, **AL** = Aluminium, **P** = Plastic, **ST** = Steel
F = Front, **R** = Rear


Ride Height	5 mm	
Camber	1.5 deg	
Droop	23.6 mm	
Castor	4 deg	
Toe	1 deg	
Anti Roll Bar	1.1 ☐ 1.2 ☐ 1.3 ☒ 1.4 ☐	
Upper Link Mount	0 Notch ☒ 1 Notch ☐ 2 Notch ☐	
Spool Height	↑☒ ↓☐	U8777 +0.5mm Alloy Eccentric ☐ / U9523 Low Trans Housing ☐
Servo Horn Height	17.5 mm	Saver ☐
Steering Travel	24 in	out
Shock Mount Position	Inboard ☒	Outboard ☐

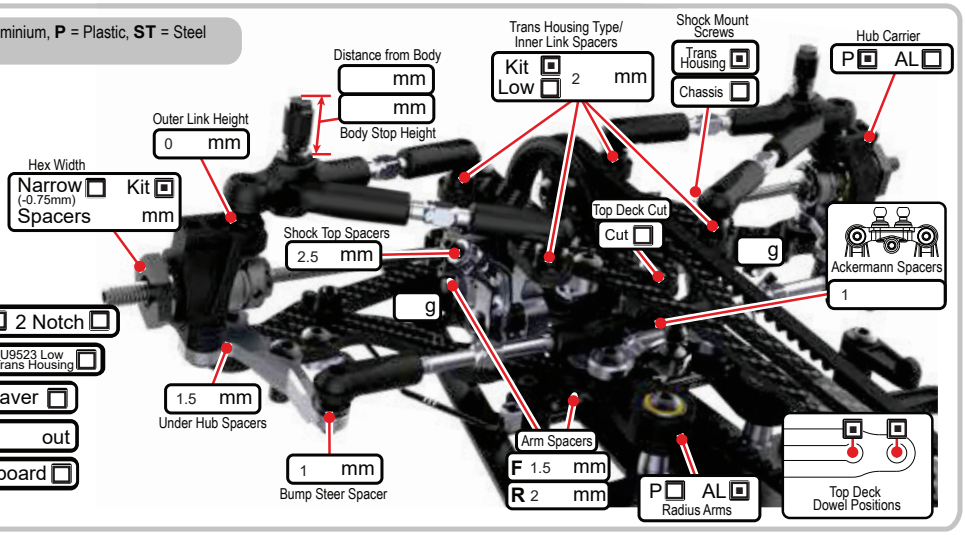

REAR

KEY: **CF** = Carbon Fibre, **AL** = Aluminium, **P** = Plastic, **ST** = Steel
F = Front, **R** = Rear

Ride Height	5.2 mm	
Camber	1.5 deg	
Droop	22.4 mm	
Castor	2 deg	
Toe	3 deg	
Anti Roll Bar	1.1 ☐ 1.2 ☐ 1.3 ☒ 1.4 ☐	
Upper Link Mount	0 Notch ☒ 1 Notch ☐ 2 Notch ☐	
Diff Height	↑☒ ↓☐	U8777 +0.5mm Alloy Eccentric ☐ / U9522 Low Trans Housing ☐
Diff Setting	6k cSt	Diff Checker # / Warming ☒ Duration: 45s
Shock Mount Position	Inboard ☒	Outboard ☐

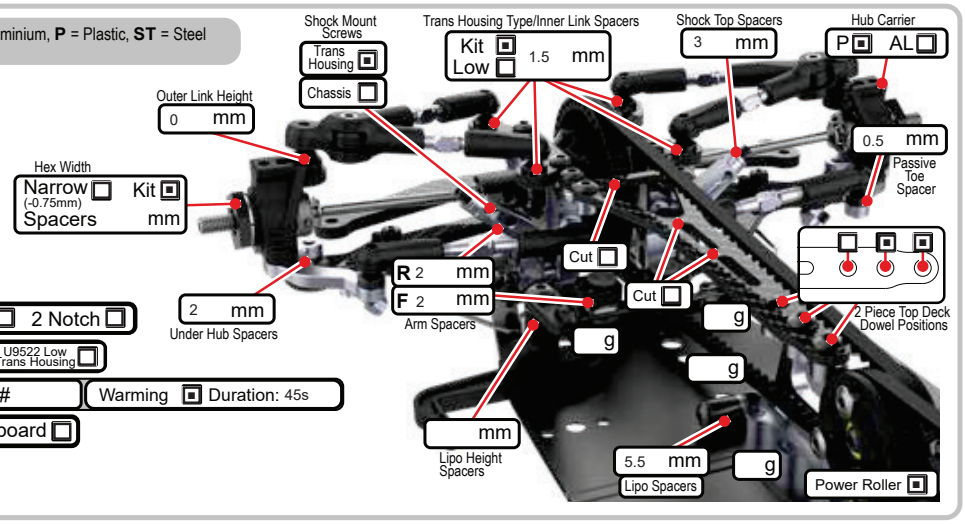

BODYSHELL

Body	Twister Speciale	
Wing	MR33 Speciale	End Plates ☒
Wing Height	mm	
Splitter Height	mm	
Body Weight	g	
Body Offset Fwrd	mm	
Front Post	1dot ☐ 2dot ☐ 3dot ☐ Pin Hole ☐	
Rear Post	1dot ☐ 2dot ☐ 3dot ☐ Pin Hole ☐	
Type:		

Notes:

CHASSIS

Chassis		
ST ☒	CF ☐	AL ☐

Top Deck Options

1 Pc TITC U9550 ☐

Front 2 Piece	Rear 2 Piece
C/F 1.6 ☐	C/F 1.6 ☐
C/F 2.0 ☒	C/F 2.0 ☒

Motor Mount Screws

R ☐ ☐ ☐ ☐ F

PTFE Tape ☐ | Total Weight g

Weight Distribution

% 11 g - Rear

ELECTRONICS

E.S.C.	Hobbywing G3X	+ g
Servo	Aerox LP2S	
RX	Sanwa	+ g
LiPo	Aerox 6000	+ g
Motor	Hobbywing 17.5	Spacers mm
Rotor Dia.	mm	
Timing	deg	
Gear Pitch	48 ☐	64 ☒
Pinion	t	
Spur	t	
Ratio		

SHOCKS

KEY: **x** = Stroke, **e** = external

	FRONT	REAR
Spring	Core Green	Core Black
Oil	400 cSt	400 cSt
Piston	Kit ☒	Kit ☒
Length (x)	8 mm	8 mm
Rebound	0 mm	0 mm
Limiters (e)	NA mm	NA mm
Body	Kit ☒	K-Coat U8770 ☐

Notes: