SET-UP SHEET

XB4'25 SET-UP SHEET VER.1 ©XRAY

XRAY XB4'25

RACE	JMRCA All Japan Championship		
TRACK	RC PARK GOJO		
NAME	Kiyomasa inoue	DATE	2025.11.30

LAPS		BEST LAP TIME	sec
QUALIFYING POSITION		FINAL POSITION	

TRACK

SIZE	☐ OPEN	☒ MEDIUM	☐ TIGHT	
TRACTION	☐ ☐ ☐ ☐ ☐ ☐ ☒ ☐ ☐	VERY-LOW	MEDIUM	VERY-HIGH
SURFACE	☒ SMOOTH	☐ MEDIUM	☐ BUMPY	
TYPE	☒ CLAY	☐ CARPET	☐ ASTRO	
CONDITION	☐ BLUE GROOVE	☐ HARD PACKED	☒ DRY	
	☐ DUSTY	☐ LOAMY	☐ WET	


DIFFERENTIAL TYPE

FRONT ↓	MIDDLE ↓	REAR ↓
GEAR ☒ DIFF	SLIPPER ☐ ☐ SOLID	GEAR ☒ DIFF
ACTIVE ☐ DIFF	GEAR ☒ DIFF	ACTIVE ☐ DIFF
60° 90° 120°	ACTIVE ☐ DIFF	60° 90° 120°
OIL 10000 cSt	60° 90° 120°	OIL 100000 cSt
	OIL 300000 cSt	

SATELLITE GEARS

COMP. ☐	COMP. ☒	COMP. ☐
STEEL ☒ ☐ O-RING	STEEL ☐ ☐ O-RING	STEEL ☒ ☐ O-RING
40T ☒ ☐ 41T	CROWN GEAR	40T ☒ ☐ 41T

CENTRAL SLIPPER & ONE-WAY SETTING

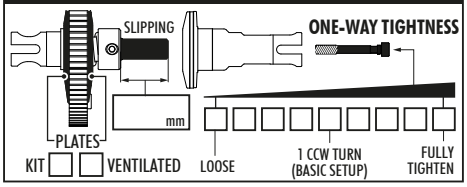

GEARING

PINION	18 T	81 T	SPUR GEAR

SHOCKS

FRONT		REAR
4dot	SPRINGS	4dot
cSt 425	OIL	375 cSt
2 HOLES ☒	ø1.6mm ☐ ø1.8mm ☒	☒ 2 HOLES
Holes	ø mm ø 1.9 mm	Holes
KIT ☒ 2.0mm ☐ Precision ☐ 2.5mm ☒	PISTON THICKNESS	☐ 2.0mm ☒ KIT ☒ 2.5mm ☐ Precision
COMPOSITE ☐ ALU ☐ 0mm ☐ -2mm ☒ -4mm ☐	COLLAR	☐ 0mm ☒ -2mm ☐ -4mm ☐ COMPOSITE ☐ ALU
☐ +4mm ☒ +2mm ☐ 0mm	BALL JOINT	☐ 0mm ☒ +2mm ☐ +4mm

ANTI ROLL BAR

FRONT		REAR
1.8 mm	THICKNESS	1.8 mm

TIRES

FRONT		REAR
JC smoothie2	BRAND	JC smoothie2
silver	COMPOUND	silver
	INSERTS	
369912Y	WHEELS	329913Y

ELECTRONICS

MOTOR	M.M5.5	HW g2S	SPEEDO
MOTOR TIMING	20	ORCA4290	BATTERY

BODY		TOTOAL WEIGHT
Delta	☒ LIGHT	1720 /g

COMMENTS

FRONT — APPLIED ◉ ☒ APPLIED — REAR

