SET-UP SHEET

X4'24 SET-UP SHEET VER.1 ©XRAY

XRAY X4'24

RACE	Strickland March Race
TRACK	Strickland RC
NAME	Chris Oathout
DATE	03/22/26

QUAL POSITION	FINAL POSITION	BEST LAPTIME	LAPS	TIME
5	8	14.6 /sec	23	6:08

TRACK

TRACK SURFACE		CARPET	[X] ASPHALT
TRACK LAYOUT	[X] TECHNICAL	MIXED	FAST
TRACTION	LOW	MEDIUM	HIGH

TRANSMISSION

FRONT		REAR	
GEAR DIFF OIL	/cSt	[X] FRONT SOLID AXLE	GEAR DIFF OIL 4K /cSt
PINION	48 /T	SPUR GEAR 88 /T	FINAL DRIVE RATIO 3.48

SHOCKS

FRONT		REAR
2.6	XRAY SPRINGS	2.5
350 cst	OIL /Cst	350 cst
	REBOUND %	
YES NO	FOAM INSERTS	YES NO
[X] 4 HOLES [X] PSS	1.1mm / 1.2mm	4 HOLES [X] PSS
SHOCK LENGTH /mm		SHOCK LENGTH /mm


1.1 THICKNESS/mm — ANTI-ROLL BAR — THICKNESS/mm 1.1

HPI treaded	TIRES	HPI treaded
MGY	ADDITIVE	MGY
10 min	ADDITIVE TIMING	10 min
	WIPE OFF TIME	
Timing: 10 min / Temp.: 127	TIRE WARMERS	Timing: 10 min / Temp.: 127

FRONT LEFT, FRONT RIGHT, REAR LEFT, REAR RIGHT — TREATED AREA

TOTAL WEIGHT	1327 /g	WEIGHT BALANCE	FRONT 51 %	REAR 49 %


MOTOR	ORCA	TIMING	
ESC	TEKIN RS GEN 3	BATTERIES	TEKIN 5900
BODY	DODGE DART	WING	

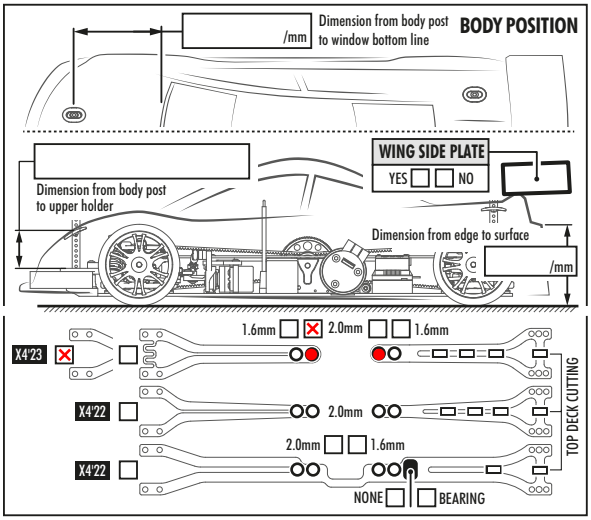


COMMENTS

Track temp was 81 at start 131 for mains
Rear Droop 24.2 W MR33 Gauge
Front Droop 23
Try a little more brake for next race
No Drag brake at all


FRONT & REAR SUSPENSION

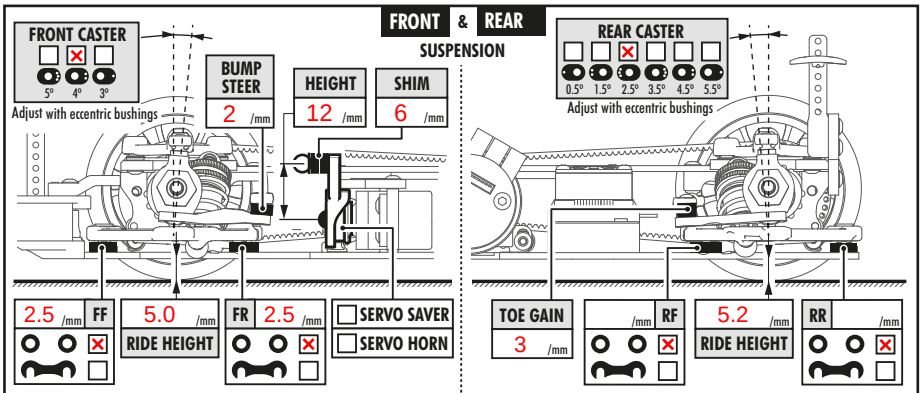


FRONT

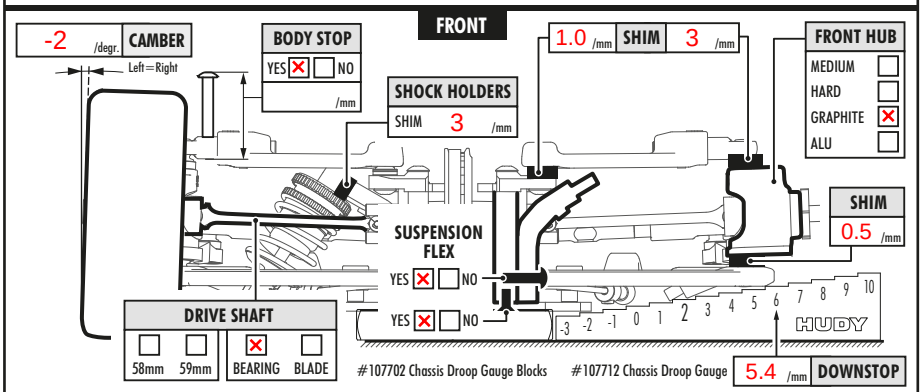

REAR

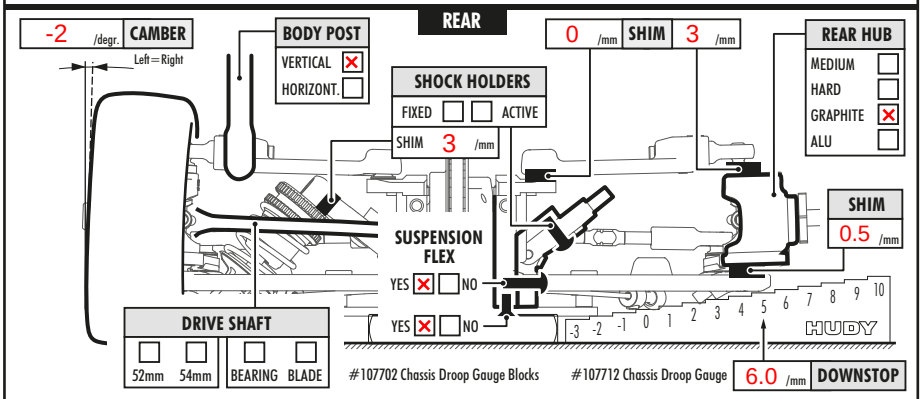

FRONT TOP VIEW REAR

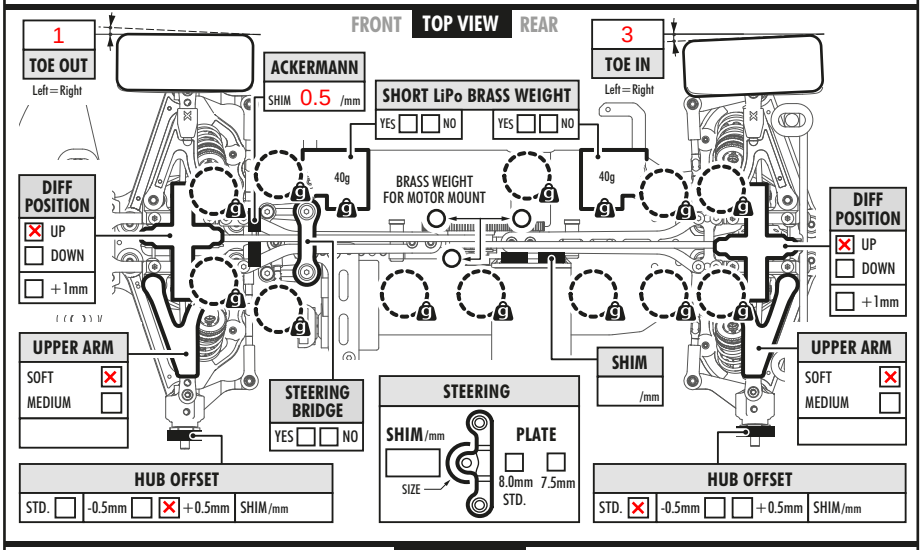

FRONT BOTTOM VIEW REAR

