SET-UP SHEET

XRAY XB4'27

RACE	Florida Carpet Championship		
TRACK	Beachline Raceway		
NAME	Michal Hudy	DATE	8.11.2026
COUNTRY	USA	CITY	Cocoa

TRACK TEMP.	QUAL POS.	FINAL POS.	BEST LAPTIME	LAPS	TIME
30	1	1	/sec	/	

TRACK

SIZE	☐ OPEN	☒ MEDIUM	☐ TIGHT
TRACTION	LOW ☐☐☐☐☐☐☐☒		☐ HIGH
SURFACE	☒ SMOOTH	☐ MEDIUM	☐ BUMPY
TYPE	☐ CLAY	☒ CARPET	☐ ASTRO
CONDITION	☐ BLUE GROOVE	☐ HARD PACKED	☐ DRY
	☐ GLUED	☐ DUSTY	☐ LOAMY	☐ WET


DIFFERENTIAL

FRONT ↓	MIDDLE ↓	REAR ↓
GEAR ☒ DIFF	SLIPPER ☐ ☒ SOLID	GEAR ☒ DIFF
ACTIVE ☐ DIFF	GEAR ☐ DIFF	ACTIVE ☐ DIFF
60° 90° 120°	ACTIVE ☐ DIFF	60° 90° 120°
	60° 90° 120°	
OIL 40 cSt	OIL cSt	OIL 30 cSt

SATELLITE GEARS

COMP. ☐ STEEL ☒ ☒ O-RING	COMP. ☐ STEEL ☐ ☐ O-RING	COMP. ☐ STEEL ☒ ☒ O-RING
40T ☒ ☐ 41T	CROWN GEAR	40T ☒ ☐ 41T

CENTRAL SLIPPER & ONE-WAY SETTING

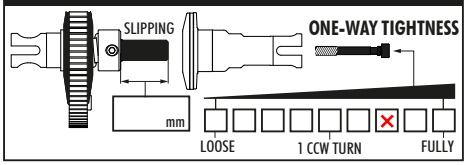

GEARING

PINION	28 T	SPUR GEAR	72 T

SHOCKS

FRONT		REAR
4	SPRINGS	4
500 cSt	OIL	475 cSt
2 HOLES ☒	☒ ø1.6mm ☐ ☐ ø1.8mm ☒	☐ ☒ 2 HOLES
Holes	ø mm ø mm	Holes
KIT ☐ Precision ☒	2.0mm ☐ 2.5mm ☒ PISTON THICKNESS	2.0mm ☒ 2.5mm ☐ KIT ☐ Precision ☒
COMPOSITE ☒ ALU ☐	0mm ☐ -2mm ☒ -4mm ☐ -6mm ☐ COLLAR	0mm ☐ -2mm ☐ -4mm ☒ -6mm ☐ COMPOSITE ☒ ALU ☐
+4mm ☐ +2mm ☐ 0mm ☒	BALL JOINT	0mm ☒ +2mm ☐ +4mm ☐

ANTI ROLL BAR

FRONT		REAR
2.0 mm	THICKNESS	2.0 mm

TIRES

FRONT		REAR
JC	BRAND	JC
PINK	COMPOUND	PINK
STD	INSERTS	STD
Xray	WHEELS	Xray

ELECTRONICS

MOTOR	HW 13,5T	Elceram G2	SPEEDO
SERVO	Savox	LRP 4400	BATTERY

BODY		TOTAL WEIGHT
Delta 4CL	☒ LIGHT	1600 /g

COMMENTS

FRONT — APPLIED ◉ ☒ APPLIED — REAR

CASTER BLOCK: MEDIUM ☐ HARD ☐ GRAPHITE ☐ ALU ☒
LONGER BUSHINGS: UP ☐ DOWN ☐
DRIVE SHAFT: CVD ☐ ☒ ECS — 84 /mm
ALU C-HUB: UP /mm DOWN 2 /mm — ALU ☒
STEERING BLOCK: MEDIUM ☐ GRAPHITE ☐
SHIM 2 /mm
LAYDOWN
STANDARD ☒ 5 DOT ☐ 3 DOT
DRIVE SHAFT: ☒ KIT (CVD) ☐ UNIVERSAL
SHIM 2 /mm
SHIM 2 /mm — ☐ MEDIUM ☐ HARD ☐ GRAPHITE ☒ ALU
REAR UPRIGHT
☐ HIGH ☐ LOW ☒ EXTRA LOW
IN OUT — Arm mounting pos.
#325341 ADJ. DRIVE AXLE
20mm HUDY 20mm
#107701 SUPPORT BLOCKS
DOWNSTOP ☐ DOWNSTOP ☐

FRONT

CASTER: ☐ 6° ☒ 7° ☐ 9° ☐ 12°
OFFSET: 1 /slots
SERVO SAVER: SOFT ☐ MEDIUM ☐ TIGHT ☒
MATERIAL: KIT ☐ GRAPHITE ☒
BUMP STEER: 2 /mm
Cutting line +/- from the base line. 0 +/- mm
Wing length -5 /mm
SHOCK TOWER 2 /mm
Offset wing mounting behind the rear shock tower.
WING TYPE: Lush — KIT ☒ ☐ THICK
WING POSITION: UP ☒ MIDDLE ☐ DOWN ☐
OFFSET 2 /slots

FRONT

+3 — 1° ☐ 0.5° ☐
+3 — 1° ☐ 0.5° ☐
ROLL CENTER
ECCENTRIC BUSHINGS
REAR
1° ☒ 0.5° ☐
DOWN ☐ ☒ UP ☐ EXTRA UP #363300
1° ☒ 0.5° ☐

FRONT

FRONT TOE: 1 °
OUT
SERVO WEIGHT: STANDARD ☐ LOW PROFILE ☒
FRONT BRACE: MEDIUM ☐ HARD ☐ GRAPHITE ☒
STEER. PLATE: HARD ☐ GRAPHITE ☐ ALU ☒
BUMP STEER: SHIM 0 mm — SHIM UNDER STEER. PLATE

REAR

REAR TOE: 1 °
IN
#363242 PIVOT BALL ECCENTRIC
FRONT ☒ ☐ REAR
CARBON FOR REAR BRACE: YES ☒ ☐ NO
REAR BRACE: MEDIUM ☐ HARD ☐ GRAPHITE ☒
BATTERY SIZE: STANDARD ☐ LOWER ☒
STAND OFF: KIT ☒ LONG ☐

FRONT

SHOCK CAP: 0 Previous ☐ -1 KIT ☐ -1 ALU ☒
FRONT CAMBER 2
GLUING SIDEWALL: YES ☒ ☐ NO
DOWNSTOP 0 mm
LENGTH 20 mm
UPSTOP 2 mm
FRONT DIFF HEIGHT
RIDE HEIGHT 11 mm

REAR

REAR DIFF HEIGHT
2 REAR CAMBER
SHOCK CAP: Previous 0 ☐ KIT -1 ☐ ALU -1 ☒
DOWNSTOP 0 mm
LENGTH 25 mm
UPSTOP 2 mm
RIDE HEIGHT 11 mm
#107763 GAUGE

FRONT

FRONT ARMS: MEDIUM ☐ HARD ☐ GRAPHITE ☒
BALANCE g
STEER. FLEX: KIT ☐ ALU FLEX ☐ ALU FIX ☒
COOLING: REAR ☒ NO ☐
BALANCE g
REAR ARMS: MEDIUM ☐ HARD ☐ GRAPHITE ☒
CHASSIS: KIT ☐ STEEL ☒
T-BRACE
T-BRACE
ARMS TYPE: STANDARD ☒ DISENGAGED ☐
FRONT BATTERY POST 1 2 3
XRAY 35g
1 2 3
TRANSMISSION: STANDARD ☒ SHORT ☐
STEERING PLATE: 1 DOT ☐ 2 DOTS ☒ 3 DOTS ☐
BALANCE g
SIDE GUARDS: MEDIUM ☐ HARD ☐ GRAPHITE ☒
BALANCE g
ARM SHIM 2 mm — SHIM IN FRONT OF ARM
ARM SHIM 2 mm — SHIM BEHIND THE ARM
SHIM IN FRONT OF UPRIGHT
UPRIGHT 3 mm
WHEELBASE

REAR