SET-UP SHEET

XRAY XB4'26

RACE	40+ Worlds
TRACK	Lost Place Racers
NAME	Lee Martin
DATE	Sept 26

LAPS		BEST LAP TIME	28.9 sec
QUALIFYING POSITION	1	FINAL POSITION	1

TRACK

SIZE	☐ OPEN	☒ MEDIUM	☐ TIGHT
TRACTION	☐ ☐ ☐ ☐ ☐ ☒ ☐ ☐ ☐	VERY-LOW	MEDIUM / VERY-HIGH
SURFACE	☒ SMOOTH	☐ MEDIUM	☐ BUMPY
TYPE	☐ CLAY	☐ CARPET	☒ ASTRO
CONDITION	☐ BLUE GROOVE	☐ HARD PACKED	☒ DRY
☐ GLUED	☐ DUSTY	☐ LOAMY	☐ WET


DIFFERENTIAL TYPE

FRONT ↓	MIDDLE ↓	REAR ↓
GEAR ☒ DIFF	SLIPPER ☐ ☐ SOLID	GEAR ☒ DIFF
ACTIVE ☐ DIFF	GEAR ☒ DIFF	ACTIVE ☐ DIFF
60° 90° 120°	ACTIVE ☐ DIFF	60° 90° 120°
OIL 15k cSt	60° 90° 120°	OIL 10k cSt
	OIL 200k cSt	

SATELLITE GEARS

COMP. ☐	COMP. ☒	COMP. ☐
STEEL ☒ ☐ O-RING	STEEL ☐ ☐ O-RING	STEEL ☒ ☐ O-RING
40T ☒ ☐ 41T	CROWN GEAR	40T ☒ ☐ 41T

CENTRAL SLIPPER & ONE-WAY SETTING

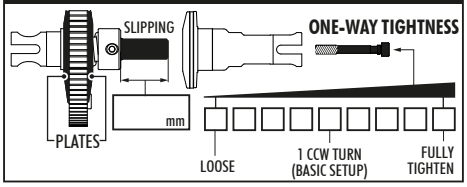

GEARING

PINION	18 T	75 T	SPUR GEAR

SHOCKS

FRONT		REAR
4 Dot	SPRINGS	2 Dot
cSt 650	OIL	550 cSt
2 HOLES ☒	☐ ø1.6mm ☒ ø1.8mm	☒ 2 HOLES
Holes	ø mm / ø 2.0 mm	Holes
KIT ☒ 2.0mm	PISTON THICKNESS	2.0mm ☒ KIT
Precision ☐ 2.5mm ☒		☒ 2.5mm Precision ☐
COMPOSITE ☒ ALU ☐	0mm ☒ -2mm ☐ -4mm ☐ -6mm ☐ COLLAR	0mm ☒ -2mm ☐ -4mm ☐ -6mm ☐ COMPOSITE ☐ ALU
☐ +4mm ☐ +2mm ☒ 0mm	BALL JOINT	☒ 0mm ☐ +2mm ☐ +4mm

ANTI ROLL BAR

FRONT		REAR
1.8 mm	THICKNESS	1.6 mm

TIRES

FRONT		REAR
Hudy	BRAND	Hudy
M	COMPOUND	M
S	INSERTS	S
Hudy	WHEELS	Hudy

ELECTRONICS

MOTOR	Nosram 5.5	Elceram Nitride	SPEEDO
SERVO	Sanwa PGS2	Nosram 4200	BATTERY

BODY		TOTAL WEIGHT
Dirt 25	☒ LIGHT	1620 /g

COMMENTS

FRONT — APPLIED ◉ ☒ APPLIED — REAR

CASTER BLOCK: MEDIUM ☐ HARD ☐ GRAPHITE ☐ ALU ☒


LONGER BUSHINGS: UP ☒ DOWN ☐

DRIVE SHAFT: CVD ☒ ☐ ECS — Lenght 84 /mm

SHIM 1 /mm

ALU C-HUB: UP /mm — DOWN /mm — ☐ ALU

STEERING BLOCK: MEDIUM ☐ GRAPHITE ☐

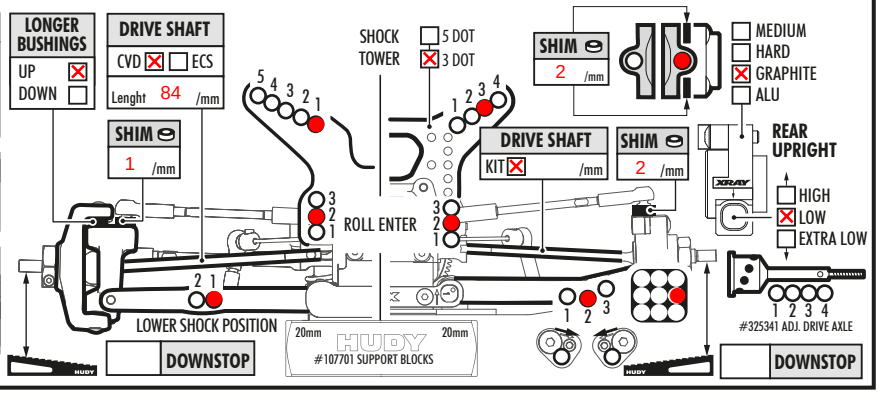


CASTER: ☐ 6° ☐ 7° ☐ 9° ☒ 12°

OFFSET 0 /slots

SERVO SAVER: SOFT ☐ MEDIUM ☐ TIGHT ☒

MATERIAL: KIT ☒ GRAPHITE ☐

BUMP STEER 1 /mm

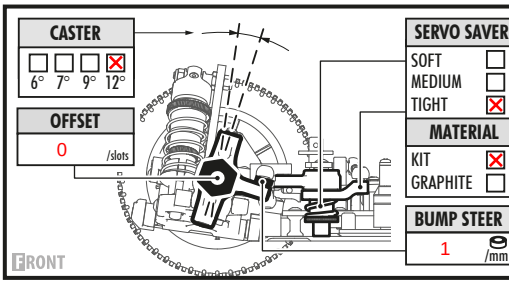

WING TYPE: KIT ☒ ☐ THICK

WING POSITION: UP ☒ MIDDLE ☐ DOWN ☐

OFFSET 3 /slots

